

# Water Dispenser Catalogue (Filtration / Direct Pipe In Type)



**Model: GWS-175SS**

**Floor Standing (Hot, Warm & Cold Water)**

Product Specification:

Voltage: 220V-240V / AC 50Hz

Heating Power: 800W

Cooling Power: 205W

Hot Water Supply: 8 L / Hour

Cold Water Supply: 8 L / Hour

Power Consumption: 1.0KW.H/24H

Refrigeration Pour: R134a / 200G

Working Ambient: 10 -38°C

100% Stainless Steel | Made in Taiwan ROC

Dimension : 490mm (width) x 450mm (depth) x 1330mm (height)



## Water Dispenser Catalogue (Filtration / Direct Pipe In Type)



**Model: GWS-291C**

**Floor Standing Water Cooler  
(Hot & Cold Water)**

Product Specification:

Voltage: 220V-240V / AC 50Hz

Cooling Power: 205W

Heating Power: 800W

Stainless steel water storage tank

Cool Water Supply: 8 Liter / Hour

Power Consumption: 1.0KW.H/24H

Refrigeration Pour: R134a / 200G

Working Ambient: 10 -38°C

100% Stainless Steel

Dimension : 463mm (width) x 315mm (depth) x 1140mm (height)



## Water Dispenser Catalogue (Filtration / Direct Pipe In Type)



**Model: GWS-293C**

**Floor Standing Water Cooler  
(Cold Water)**

Product Specification:

Voltage: 220V-240V / AC 50Hz

Power: Cooling 205W

Stainless steel water storage tank

Water Supply: Cold 8 Liters / Hour

Power Consumption: 1.0KW / H

Refrigeration Pour: R134a / 200G

Working Ambient: 10 -38°C

100% Stainless Steel

Dimension : 463mm (width) x 315mm (depth) x 1140mm (height)



## Water Dispenser Catalogue (Filtration / Direct Pipe In Type)



**Model: GWS-880**

**Floor Standing  
(Normal & Cold Water)**

Product Specification:

Cold Tank Capacity: 10L

Normal Tank Capacity: 18L

Dimension (mm): H1300 x W430 x D550



## Water Dispenser Catalogue (Filtration / Direct Pipe In Type)



**Model: GWS-C100**

**Floor Standing  
(Hot & Cold Water)**

Product Specification:

Volt./ Hz: 220-240V/50-60Hz

Power Consumption:

Cooling System: 100W

Heating System: 450W

Compressor: 1/15HP Compressor

Heating capacity: 7 liters per hour

Chiling capacity: 8 liters per hour

Tank Capacity: Cold Tank (L)3.6 ℓ , Hot Tank (L)1.6 ℓ

Cooling: Temperature Control: Thermostat , Cooling System: Forced Cooling System

Heating: Temperature Control: Thermostar , Heater Type: Sheath Type / Band Type

Overheat Protector: Auto Bi-metal

Weight: 11kg

Dimensions(mm): 310(W)X320(D)X990(H)



# Water Dispenser Catalogue (Filtration / Direct Pipe In Type)



**Model: GWS-C200F**

**Floor Standing  
(Hot & Cold Water)**

Product Specification:

Volt./ Hz: 220-240V/50-60Hz

Power Consumption:

Cooling System: 100W

Heating System: 450W

Compressor: 1/15HP Daewoo Korea Compressor

Heating capacity: 8 liters per hour

Chiling capacity: 10 liters per hour

Tank Capacity: Cold Tank (L)3.6 ℓ , Hot Tank (L)2 ℓ

Cooling: Temperature Control: Thermostat , Cooling System: Forced Cooling System

Heating: Temperature Control: Thermostar , Heater Type: Sheath Type / Band Type

Overheat Protector: Auto Bi-metal

Weight: 19kg

Dimensions: 300mm(W) X 355mm(D) X 1120mm(H)





## Water Dispenser Catalogue (Filtration / Direct Pipe In Type)



**Model: GWS-780F**

**Floor Standing**

**(Hot, Normal & Cold Water)**

Product Specification:

Product Features: Drain Container Collects water drips into the container

With indication float which rises up when container is full.

Push button control panel , LED-lighting on dispensing place.

Safety lock for hot water .

Heating capacity up to 10 liters per hour.

Chilling capacity: 12L / hour, chilled water under 10 degree C.

Capacity : Hot 2.0L , Cold 3.5L , Normal 1.5L

Consumed power : Hot 600W / Cold 210W

Dimension : 260mm (width) x 445mm (depth) x 1100mm (height)



# Water Dispenser Catalogue (Filtration / Direct Pipe In Type)



**Model: GWS-C520F**

**Floor Standing (Hot & Cold Water)**

**Touch Free System**

Product Specification:

Product Features: Double secure prevents from overheat or dry-heat.  
(by sensor and thermostat).

Automatic control for purified water refill.

Each hot and chilled water has its own individual tank..

Hot water with safety device.

Touch Free System

How it works: Hover your glass or bottle in front of the infrared sensor panel and watch it dispense all on its own. No pushing or pressing required.

Heating capacity: 5L / hour.

Hot water temperature around ( 82C~ 90C).

Capacity of each tank: Cold tank : 8 Liters / Hot tank: 1.5 Liters

Weight: F/S: 22 KG

Dimension:F/S :335mm (Width) x 360mm (Depth) x 1015mm (Height)





## Water Dispenser Catalogue (Filtration / Direct Pipe In Type)



**Model: GWS-2100**

**Floor Standing  
(Hot & Cold Water)**

Product Specification:

Volt./ Hz: 220-240V/50-60Hz

Power Consumption:

Cooling System: 100W

Heating System: 450W

Compressor: 1/15HP Daewoo Korea Compressor

Heating capacity: 20 liters per hour

Chiling capacity: 25 liters per hour

Tank Capacity: Cold Tank (L)7.2 ℓ , Hot Tank (L)5 ℓ

Cooling: Temperature Control: Thermostat , Cooling System: Forced Cooling System

Heating: Temperature Control: Thermostar , Heater Type: Sheath Type / Band Type

Overheat Protector: Auto Bi-metal

Weight: 25kg

Dimensions(mm): 340(W)X375(D)X1200(H)



# Water Dispenser Catalogue (Filtration / Direct Pipe In Type)



## **Model: GWS-PTS3000**

### **Floor Standing (Hot, Normal & Cold Water)**

#### Product Specification:

Product Features : Double secure prevents from overheat or dry-heat.  
(by sensor and thermostat).

Double secure against water overflow. (by floating valve).

Automatic control for purified water refill.

Each hot and chilled water has its own individual tank.

One Touch Sensor Screen

Hot water with safety device.

One output for three temperature water

Heating capacity: 20L / hour.

Hot water temperature can be assigned (at 82C, 85C, or 90C).

Chilling capacity: 25L / hour, chilled water under 10 degree C.

Chilling system by compressor with 1/15HP LG Korea Compressor

Capacity of each tank: Cold tank : 6 Liters / Hot tank: 2.2 Liters

Weight: 22 KG

Dimension: 300mm (width) x 400mm (depth) x 1110mm (height)



# Water Dispenser Catalogue (Filtration / Direct Pipe In Type)



## **Model: GWS-PHC914S**

### **Floor Standing (Hot & Cold Water)**

#### Product Features :

Double secure prevents from overheat or dry-heat. (by sensor and thermostat).

Double secure against water overflow. (by floating valve).

Automatic control for purified water refill.

Each hot and chilled water has its own individual tank.

Hot water tap with safety device.

Product Specification : Heating capacity : 6L / hour

Heating temperature can be around (85C ~ 91C).

Chilling capacity: 7L / hour,

Chilled water under 10 degree C.

Chilling system by compressor with 1/15HP LG Korea Compressor

Capacity of each tank: Cold tank : 5 Liters / Hot tank: 2.5 Liters

Rating Power : AC220~240V / 50/60Hz

Power Consumption : Hot:450W+/-10% , Cold : 50W+/-10%

Origin : Made in Korea

Weight : 24 KG

Dimension : 290mm (Width) x 370mm (Depth) x1150mm (Height)



## Water Dispenser Catalogue (Filtration / Direct Pipe In Type)



### **Model: GWS-P-2000**

### **Floor Standing (Hot, Normal & Cold Water)**

Product Features : Double secure prevents from overheat or dry-heat. (by sensor and thermostat).

Double secure against water overflow. (by floating valve).

Automatic control for purified water refill.

Each hot and chilled water has its own individual tank.

Hot water tap with safety device.

Color: All Black

Product Specification : Heating capacity: 25L / hour.

Hot water temperature is between (at 82C~ 90C).

Chilling capacity: 18L / hour, chilled water under 10 degree C.

Chilling system by compressor with 1/15HP Daewoo Compressor

Capacity of each tank: Cold tank : 9 Liters

Hot tank : 8 Liters

Weight : 25 KG

Dimension : 345mm (width) x 420mm (depth) x 1110mm (height)



## Water Dispenser Catalogue (Filtration / Direct Pipe In Type)



**Model: GWS-C118N**

**Floor Standing (Top Load)  
(Hot, Normal & Cold Water)**

Product Specification:

Product Features : Double secure prevents from overheat or dry-heat.  
(by sensor and thermostat).

Double secure against water overflow.

Each hot, ambient and chilled water has its own individual tank.

Water Tap : Three temperature water output

Heating capacity: 12L / hour.

Hot water temperature around ( 82C~ 90C).

Hot water tap with safety device

Chilling capacity: 9L / hour, chilled water under 10 degree C.

Chilling system by compressor with R-134a refrigerant.

Capacity of each tank: Cold tank : 3.0 Liters / Hot tank: 1.4 Liters

Dimension : 340mm (width) x 330mm (depth) x 980mm (height)

Weight : 14kg





# Water Dispenser Catalogue (Bottles Type)



**Model: GWS-BY605**

**Floor Standing (Bottom Load)  
(Hot, Normal & Cold Water)**

Product Specification:

Tank Capacity: (Cold) 2L/h / (Hot) 5L/h

Power Consumption: (Cold)85W / (Hot)500W

Voltage: 220V-240V / 50Hz/60Hz

Size(W\*D\*H): 355mm\*390mm\*1115mm


Weight: 16kg



Hot,  
Ambient &  
warm water



Hot water  
safety lock



Bottom  
Load  
Design



## Water Dispenser Catalogue (Filtration / Direct Pipe In Type)



**Model: GWS-C101**

**Table Top (Hot & Cold Water)**

Product Specification:

Volt./ Hz: 220-240V/50-60Hz

Power Consumption:

Cooling System: 100W

Heating System: 450W

Compressor: 1/15HP Compressor

Heating capacity: 7 liters per hour

Chilling capacity: 8 liters per hour

Tank Capacity: Cold Tank (L): 3.6 ℓ , Hot Tank (L): 1.6 ℓ

Cooling: Temperature Control: Thermostat , Cooling System: Forced Cooling System

Heating: Temperature Control: Thermostat

Heater Type: Sheath Type / Band Type , Overheat Protector: Auto Bi-metal

Weight: 11kg

Dimensions(mm): 310(W)X360(D)X520(H)



# Water Dispenser Catalogue (Filtration / Direct Pipe In Type)



**Model: GWS-C200S**

**Table Top (Hot & Cold Water)**

Product Specification:

Volt./ Hz: 220V~/50Hz

Power Consumption:

Cooling System: 120W

Heating System: 480W

Compressor: 1/15HP Hermetic Compressor

Length of Power Cord: 1.8 M

Tank Capacity: Cold Tank (L)3.5 ℓ , Hot Tank (L)1.6 ℓ

Cooling: Temperature Control: Thermostat , Condensing Type: Natural Convection

Heating: Temperature Control: Bi-metal, Heater Type: Sheath Type / Band Type

Overheat Protector: Auto Bi-metal

Weight: 16kg

Dimensions(mm): 300(W)X380(D)X520(H)



## Water Dispenser Catalogue (Filtration / Direct Pipe In Type)



**Model: GWS-295C**

**Wall Mounted Water Cooler  
(Hot & Cold Water)**

Product Specification:

Voltage: 220V-240V / AC 50Hz

Power: Heating 800W | Cooling 205W

Stainless steel water storage tank

Water Supply: Cold 8 Liters / Hour

Power Consumption: 1.0KW / H

Refrigeration Pour: R134a / 200G

Working Ambient: 10 -38°C

Dimension : 430mm (width) x 300mm (depth) x 520mm (height)

Unit height with swan-neck outlet 730mm



## Water Dispenser Catalogue (Filtration / Direct Pipe In Type)



**Model: GWS-297C**

**Wall Mounted Water Cooler  
(Cold Water)**

Product Specification:

Voltage: 220V-240V / AC 50Hz

Cooling Power: 205W

Stainless steel water storage tank

Cool Water Supply: 8 Liter / Hour

Power Consumption: 1.0KW.H/24H

Refrigeration Pour: R134a/200G

Working Ambient: 10 -38°C

100% Stainless Steel

Dimension : 430mm (width) x 300mm (depth) x 520mm (height)



## Water Dispenser Catalogue (Filtration / Direct Pipe In Type)



**Model: GWS-15L**

**Water Boiler (Wall Mounted)  
(Hot Water)**

Product Specification:

Product Features : Major Thermostats : EGO (German Brand)

Backup Thermostats : WAKO (Japanese Brand)

Hot Water Tank Insulation foam, UL approved

Safety Design

1. Double Protection with 2 Thermostats
2. Safety faucet body : Anti-scalded material
3. Safety faucet design: Avoid Child scalded by hot water

Product Specification : Type: Boiled Hot Water

Tank Capacity : Hot 15L

Watt : Hot: 2000W

Water connection : Tap Water

Power : 220V

Dimension : 335mm(width) x355mm(depth) x635mm(height)





# Water Dispenser Catalogue (Filtration / Direct Pipe In Type)



## **Model: GWS-26L**

### **(Wall Mounted) (Hot & Normal Water)**

#### Product Specification:

Product Features : Major Thermostats : EGO (German Brand)

Backup Thermostats : WAKO (Japanese Brand)

Hot Water Tank Insulation foam, UL approved

#### Safety Design

1. Double Protection with 2 Thermostats
2. Safety faucet body : Anti-scalded material
3. Safety faucet design: Avoid Child scalded by hot water

Product Specification : Type: Boiled Hot Water & Normal Water

Tank Capacity : Hot 26L

: Normal Unlimited


Watt : Hot: 2000W

Water connection : Tap Water

Power : 220V

Dimension : 400mm(width) x450mm(depth) x740mm(height)

Filtration System : Filtration system is optional and hang-out

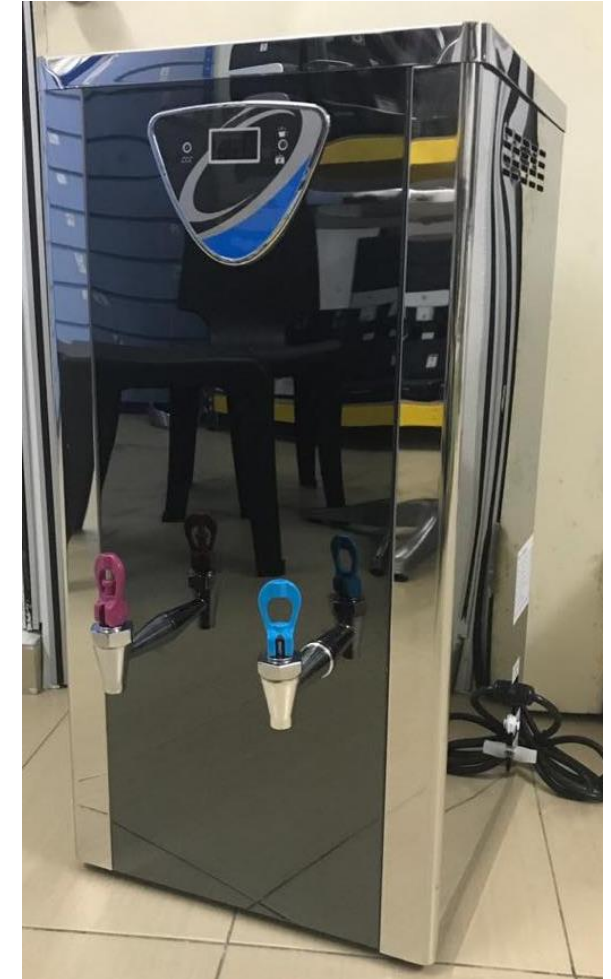



# Water Dispenser Catalogue (Filtration / Direct Pipe In Type)



## **Model: GWS-15L5I-C (Wall Mounted) (Hot & Cold Water)**

Product Specification:

Product Features : Major Thermostats

Backup Thermostats

Hot Water Tank Insulation foam, UL approved

Safety Design

1. Double Protection with 2 Thermostats
2. Safety faucet body : Anti-scalded material
3. Safety faucet design: Avoid Child scalded by hot water

Product Specification : Type: Hot & Cold Stainless Steel Water Dispenser

Tank Capacity : Hot 15L/hour ; Cold 5L/hour

Watt : Hot 1200W/2400W ; Cold 200W

Water connection : Tap Water

Power : 220V

Refrigerant : R-134a .

Dimension : 480mm(width) x410mm(depth) x620mm(height)

Filtration System : Filtration system is optional and hang-out



# Water Dispenser Catalogue (Filtration / Direct Pipe In Type)



**Model: GWS-20L8I**

**(Wall Mounted) (Hot & Cold Water)**

Product Specification:

Product Features : Major Thermostats

Backup Thermostats

Hot Water Tank Insulation foam, UL approved

Safety Design

1. Double Protection with 2 Thermostats
2. Safety faucet body : Anti-scalded material
3. Safety faucet design: Avoid Child scalded by hot water

Product Specification : Type: Hot & Cold Stainless Steel Water Dispenser

Tank Capacity : Hot 20L ; Cold 8L

Watt : Hot 3600W ; Cold 200W

Water connection : Tap Water

Power : 220V

Compressor: LG

Dimension : 590mm(width) x420mm(depth) x720mm(height)

Filtration System : Filtration system is optional and hang-out



# Water Dispenser Catalogue (Filtration / Direct Pipe In Type)



## **Model: GWS-2101**

### **Table Top (Hot & Cold Water)**

#### Product Specification:

Volt./ Hz: 220-240V~/50-60Hz

Power Consumption:

Cooling System: 100W

Heating System: 450W

Compressor: 1/15HP Daewoo Korea Compressor

Heating capacity: 20 liters per hour.

Chilling capacity: 25 liters per hour.

Tank Capacity: Cold Tank (L)5.5 ℓ , Hot Tank (L)2 ℓ

Cooling: Temperature Control: Thermostat

Cooling System: Forced Cooling System

Heating: Temperature Control: Thermostat , Heater Type: Sheath Type / Band Type

Overheat Protector: Auto Bi-metal

Weight: 20kg

Dimensions(mm): 340(W)X375(D)X620(H)



## Water Dispenser Catalogue (Filtration / Direct Pipe In Type)



**Model: GWS-780T**

**Table Top (Hot, Warm & Cold Water)**

Product Specification:

Product Features:

Drain Container Collects water drips into the container

With indication float which rises up when container is full.

Push button control panel , LED-lighting on dispensing place.

Safety lock for hot water.

Product Specification: Heating capacity up to 10 liters per hour.

Chilling capacity: 12L / hour, chilled water under 10 degree C.

Capacity: Hot 2.5L , Cold 3L , Normal 4L

Consumed power: Hot 600W / Cold 210W

Dimension: 260mm (width) x 445mm (depth) x 580mm (height)



# Water Dispenser Catalogue (Filtration / Direct Pipe In Type)



## **Model: GWS-PTS3001**

### **Table Top (Hot, Normal & Cold Water)**

#### Product Specification:

Product Features: Double secure prevents from overheat or dry-heat. (by sensor and thermostat).

Double secure against water overflow. (by floating valve).

Automatic control for purified water refill.

Each hot and chilled water has its own individual stainless steel tank.

One Touch Sensor Screen

Hot water with safety device.

One output for three temperature water

Color: Black Silver

Heating capacity: 20L / hour.

Hot water temperature can be assigned (at 82C, 85C, or 90C).

Chilling capacity: 25L / hour, chilled water under 10 degree C.

Chilling system by compressor with 1/15HP LG Korea Compressor

Capacity of each tank: Cold tank: 4.5 Liters / Hot tank: 1.6 Liters

Weight: 20 KG

Dimension: 300mm (width) x 400mm (depth) x 530mm (height)





# Water Dispenser Catalogue (Filtration / Direct Pipe In Type)



**Model: GWS-C520T**

**Table Top (Hot & Cold Water)**

**Touch Free System**

Product Specification:

Product Features : Double secure prevents from overheat or dry-heat.  
(by sensor and thermostat).

Automatic control for purified water refill.

Each hot and chilled water has its own individual tank..

Hot water with safety device.

Touch Free System

How it works: Hover your glass or bottle in front of the infrared sensor panel and watch it dispense all on its own. No pushing or pressing required.

Color: White with Black

Heating capacity : 5L / hour.

Hot water temperature around ( 82C~ 90C).

Weight : T/T :18 KG

Dimension: T/T :335mm (Width) x 390mm (Depth) x 560mm (Height)





## Water Dispenser Catalogue (Filtration / Direct Pipe In Type)



**Model: GWS-TK-WD-S8DC**

**Wall Mounted**

Product Specification:

Volt/hz: 220V / AC 50HZ

Hot Water Capacity & Ability: 20L/H (.90c)

Rated Power Hot: 2100W

Environment Temperature: 5-38

Function – Water Volume: 180ml – 999ml

(adjustable) Water Temperature: 15c – 100c

Power Consumption:  $\leq 0.6$  kw – h/24h

Incoming Water Pressure Requirement: 0.1 – 0.4 mpa

Gross Weight: 3.4kg

Dimension (mm): 300(W) x 118(D) x 400(H)



# Water Dispenser Catalogue (Filtration / Direct Pipe In Type)



**Model: GWS-C880**

**Table Top (Hot & Cold Water)**

Product Specification:

Product Features :

Temperature Digital Displays Screen Double secure prevents from overheat or dry-heat.  
(by sensor and thermostat).

Double secure against water overflow. (by floating valve).

Automatic control for purified water refill.

Each hot and chilled water has its own individual tank..

Heating capacity: 8L / hour.

Hot water temperature can be assigned (at 82C, 85C, or 90C).

Chilling capacity: 10L / hour

Cold water Temperature : under 10 degree C.

Chilling system by compressor with 1/15HP Compressor

Capacity of each tank: Cold tank: 3.5 Liters / Hot tank: 1.6 Liters

Weight: 18 KG

Dimension: 255mm (Width) x 500mm (Depth) x 545mm (Height)



# Water Dispenser Catalogue (Filtration / Direct Pipe In Type)



**Model: GWS-C680T**

**Table Top (Hot, Normal & Cold Water)**

Product Specification:

Volt./ Hz: 220-240V/50-60Hz

Power Consumption:

Cooling System: 100W

Heating System: 450W

Compressor: 1/15HP Compressor

Heating capacity: 8 liters per hour

Chiling capacity: 10 liters per hour

Tank Capacity: Cold Tank (L)3.0 ℓ , Hot Tank (L)1.5 ℓ

Cooling: Temperature Control: Thermostat , Cooling System: Forced Cooling System

Heating: Temperature Control: Thermostar , Heater Type: Sheath Type / Band Type

Overheat Protector: Auto Bi-metal

Weight: 17kg

Dimensions (mm):225(W)X500(D)X545(H)



# Water Dispenser Catalogue (Filtration / Direct Pipe In Type)



## **Model: GWS-C360**

### **Table Top (Hot, Normal & Cold Water)**

#### Product Specification:

Product Features: Double secure prevents from overheat or dry-heat.  
(by sensor and thermostat).

Double secure against water overflow.

Each hot and chilled water has its own individual tank.

Hot water tap with safety device

Water Tap : Three temperature water output

Product Specification : Heating capacity: 12L / hour.

Hot water temperature can be assigned (at 82C, 85C, or 90C).

Chilling capacity: 9L / hour, chilled water under 10 degree C.

Chilling system by compressor with R-134a refrigerant.

Capacity of each tank: Cold tank: 2.8 Liters / Hot tank: 1.5 Liters

Dimension: 355mm (width) x 312mm (depth) x 490mm (height)

Weight: 17kg



## Water Dispenser Catalogue (Filtration / Direct Pipe In Type)



### **Model: GWS-PHC914C**

#### **Table Top (Hot & Cold Water)**

Product Features : Double secure prevents from overheat or dry-heat. (by sensor and thermostat).

Double secure against water overflow. (by floating valve).

Automatic control for purified water refill.

Each hot and chilled water has its own individual tank.

Hot water tap with safety device.

Color: Black With Red / White With Black

Product Specification : Heating capacity : 5L / hour

Heating temperature can be around (85C ~ 91C).

Chilling capacity: 6L / hour,

Chilled water under 10 degree C.

Chilling system by compressor with 1/15HP LG Korea Compressor

Capacity of each tank: Cold tank : 3.5 Liters / Hot tank: 2 Liters

Rating Power : AC220~240V / 50/60Hz

Power Consumption : Hot:350W+/-10% , Cold : 50W+/-10%

Origin : Made in Korea

Weight : 18 KG

Dimension : 290mm (Width) x 370mm (Depth) x 528mm (Height)





# Water Dispenser Catalogue (Filtration / Direct Pipe In Type)



## **Model: GWS-66ST**

Hot ,Warm & Cold Table Top Instant Water Dispenser

### **3 Seconds Fast Boiling & Chilling**

Product Features :

Water Temperature : 15 ~98'c .

3 Level Water Flow : 150ml, 300ml, 500ml .

Diverse Water Way : Pipe-In .

Color : Black

Double secure prevents from overheat or dry-heat. (by sensor and thermostat). Cooling

System Of Electric Double Fan Cooling

Automatic control for purified water refill.

Hot water with safety device.

Temperature control switch

Product Specification :

Volt : 220V-240V~50-60Hz

Rate Power : 2370W

Heating Power : 2300W

Cooling Power : 70W

Weight : 4 KG

Dimension : 180mm (width) x 280mm (depth) 398mm (height)





# Water Dispenser Catalogue (Filtration / Direct Pipe In Type)



## Model: GWS-510FS

Floor Standing Direct Piping Water Dispenser  
Hot ,Puri & Cold Floor Standing Water Dispenser

### Product Features :

- Double secure prevents from overheat or dry-heat. (by sensor and thermostat).
- Double secure against water overflow. (by floating valve).
- Automatic control for purified water refill.
- Each hot and chilled water has its own individual tank.
- Hot water tap with safety device.
- Color: White With Silver

### Product Specification :

- Heating capacity : 5L / hour
- Heating temperature can be around (85C ~ 92C).Chilling capacity: 6L / hour,
- Chilled water under 10 degree C.
- Chilling system by compressor with **1/15HP LG Korea Compressor**
- Capacity of each tank: Cold tank : 2.7L(Purified Water 1L + Cold Water 1.7L)
- Hot tank: 1.4 Liters
- Rating Power : AC220 / 50Hz
- Power Consumption : Hot:400W , Cold : 480W
- Origin : Made in Korea
- Weight : 20 KG
- Dimension : 230mm (Width) x 420mm (Depth) x 1195mm (Height)



# Water Dispenser Catalogue (Filtration / Direct Pipe In Type)



Model: GWS-30T  
Counter Top Water Dispenser

## Product Features :

Double secure prevents from overheat or dry-heat. (by sensor and thermostat).

Double secure against water overflow. (by floating valve).

Automatic control for purified water refill.

Each hot and chilled water has its own individual tank.

Hot water tap with safety device.

Color: Silver Black

## Product Specification :

Heating capacity: 6L / hour.

Hot water temperature can be around (at 82C ~ 90C).

Chilling capacity : 11L/ hour, chilled water under 10 degree C.

Chilling system by compressor with 1/15HP LG Korea Compressor

Capacity of each tank : Cold tank : 3.6 Litres / Hot tank : 1.8 Litres

Weight : 16 KG

Dimension : 280mm (width) x 400mm (depth) x 530mm (height)



# Water Dispenser Catalogue (Filtration / Direct Pipe In Type)



## Model: GWS-50T

Counter Top Hot, Puri & Cold Water Dispenser

### Product Features :

Double secure prevents from overheat or dry-heat. (by sensor and thermostat).

Double secure against water overflow. (by floating valve).

Automatic control for purified water refill.

Each hot and chilled water has its own individual tank.

Hot water tap with safety device.

Color: White with Silver / Black with Silver

### Product Specification :

Heating capacity: 5L / hour.

Heating temperature can be around (85C ~ 92C).

Chilling capacity : 6L/ hour, chilled water under 10 degree C.

Chilling system by compressor with **1/15HP LG Korea Compressor**

Capacity of each tank : Cold tank : 2.7 L(Purified Water 1L + Cold Water 1.7L)

Hot tank : 1.4 Litres

Rating Power : AC220-240V / 50/60Hz

Power Consumption : Hot:400W,Cold:4890W

Origin : Made in Korea

Weight : 14 KG

Dimension : 230mm (width) x 490mm (depth) x 510mm (height)



# Water Dispenser Catalogue (Filtration / Direct Pipe In Type)



## GWS-C118T

### Pipe-In Type Table Water Dispenser

#### Product Features :

Double secure prevents from overheat or dry-heat. (by sensor and thermostat).

Double secure against water overflow.

Each hot and chilled water has its own individual tank. Water Tap : Three temperature water output

Color: White With Black

#### Product Specification :

Heating capacity: 5L / hour.

Hot water temperature around ( 82C~ 90C).

Hot water tap with safety device

Chilling capacity: 6L / hour, chilled water under 10 degree C.

Chilling system by compressor with R-134a refrigerant.

Capacity of each tank: Cold tank : 3.0 Liters / Hot tank: 1.4 Liters

Dimension : 315mm (width) x 350mm (depth) x 490mm (height) Weight : 14kg



## Water Dispenser Catalogue (Filtration / Direct Pipe In Type)



### **GWS-C770F Hot ,Normal & Cold Floor Standing Water Dispenser**

#### **Product Features :**

Double secure prevents from overheat or dry-heat. (by sensor and thermostat).

Double secure against water overflow. (by floating valve).

Automatic control for purified water refill.

Each hot and chilled water has its own individual tank.

Hot water tap with safety device.

Color: White with Black

#### **Product Specification :**

Heating capacity : 5L / hour.

Hot water temperature can be around ( 82C~ 90C).

Chilling capacity : 4.5L / hour

Cold water Temperature : under 10 degree C.

Chilling system by compressor with **1/15HP Compressor**

Capacity of each tank: Cold tank : 3.7 Liters

Hot tank: 1.8 Liters

Room Tank : 1 Liter

Weight : 23 KG

Dimension : 291mm (Width) x 460mm (Depth) x 1180mm (Height)





# Water Dispenser Catalogue (Bottom Load Type)



GWS-C308BL

## Hot, Normal & Cold Floor Standing Water Dispenser

### Product Features :

- Double secure prevents from overheat or dry-heat. (by sensor and thermostat).
- Double secure against water overflow.
- Automatic control for purified water refill.
- Each hot, ambient and chilled water has its own individual tank.
- Water Tap : Three temperature water output
- Color: Black with White

### Product Specification :

- Heating capacity: 6L / hour.
- Hot water temperature can be around (82C~ 90C).
- Chilling capacity: 5L / hour, chilled water under 10 degree C.
- Chilling system by copper compressor with R-134a refrigerant.
- Capacity of each tank: Cold tank : 3.2 Liters / Hot tank: 1.4 Liters
- Voltage : 220V~240V
- Frequency : 50~60Hz
- Dimension : 325mm (width) x 340mm (depth) x 1100mm (height)
- Weight : 14kg

